




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b>		A2	(11) International Publication Number: <b>WO 99/31916</b>
			(43) International Publication Date: 24 June 1999 (24.06.99)
(21) International Application Number: PCT/FI98/00969 (22) International Filing Date: 11 December 1998 (11.12.98) (30) Priority Data: 974519 15 December 1997 (15.12.97) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): VERKAMA, Markku [FI/FI]; Hakamäki 2 A 12, FIN-02120 Espoo (FI). AXERUD, Bo [SE/FI]; Vällitalontie 31 B 4, FIN-00660 Helsinki (FI). (74) Agent: PATENT AGENCY COMPATENT LTD.; P.O. Box 156, FIN-00511 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published Without international search report and to be republished upon receipt of that report.	

(54) Title: HANDLING OF FORWARDED CALLS

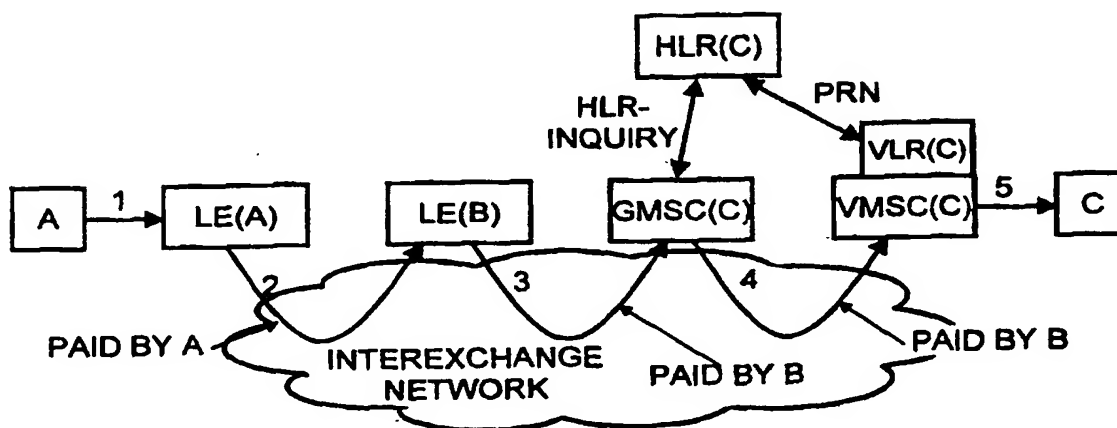

## (57) Abstract

This invention proposes a new charging principle according to which the roaming leg is paid entirely by the party who forwards the call to a mobile subscriber. In an exemplary embodiment, the call is first routed to the exchange of subscriber B, who has forwarded his calls. After determining that the call is to be forwarded to a mobile subscriber C, the exchange routes the call to the gateway mobile switching center GMSC capable of making interrogations to the home location register of subscriber C. When the charging record for the call is generated, the called subscriber B is charged for the leg between the GMSC and subscriber C. Thus, subscriber C does not have to pay for calls addressed to subscriber B. To minimize the call costs to subscriber B, as direct a route as possible is preferably used on the leg between the GMSC and subscriber C.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## Handling of forwarded calls

### Field of the invention

This invention concerns the handling of calls that are forwarded to a mobile telephone.

### 5                   Background of the invention

Call transfer is one of the most commonly used services in modern telecommunication networks. In the service a subscriber can specify that calls destined to him are to be forwarded to another subscriber's number. For example, Beth can transfer her calls to Cindy when leaving her home to visit Cindy. A subscriber can specify that his calls be forwarded in various situations. For example, when the CFU (Call Forwarding Unconditional) service is activated, all the calls destined to the subscriber are forwarded to a given number. In the CFB (Call Forwarding on Busy) service, calls are forwarded if the called subscriber is busy. By activating the CFNRy (Call Forwarding on No Reply) service, the subscriber instructs that his calls are to be forwarded after 4 alert tones, for example, if the call is not answered before that. For mobile subscribers the CFNRc (Call Forwarding on Not Reachable) service can be defined. In CFNRc the calls are forwarded if the subscriber is not in the coverage area of the mobile telecommunication network, or if he has turned his mobile station off.

The routing of forwarded calls, as well as the charging principle for forwarded calls, are shown in Figure 1. In the figure, the calling party A makes a call to B. B has forwarded his calls to C. This is done by giving the exchange of B instructions to forward the calls addressed to B to a third party C. Both B and C are fixed network subscribers. A may be a fixed network subscriber or a mobile network subscriber. The call is first routed from A via his Local Exchange LE(A) to the local exchange LE(B) of B. Information concerning the specified call forwarding is stored in LE(B). In response to having received the request for call establishment from LE(A), LE(B) notices that the call is to be forwarded to C. In response to that, LE(B) routes the call to the forwarded to party C via the local exchange LE(C) of C. LE(B) becomes the transit point of the call. The first call leg from A to LE(B) is paid by subscriber A. The forwarded leg from LE(B) to C is paid by subscriber B.

In Figure 2 is shown a situation where the call is forwarded to mobile subscriber. In the example, both A and B subscribers are fixed network subscribers. However, they can also be mobile subscribers without causing any remarkable changes in the process. When compared to the case shown in Figure 1, the only difference is the leg between LE(B) and subscriber C. This is due to the basic feature of mobile telecommunication systems: the location of the subscriber is not fixed. Therefore, the location of the subscriber has to be ascertained before establishing the connection.

In modern mobile telecommunications networks, the network maintains information about the location of the mobile subscribers. In the GSM network used as an example in this application, this information is distributed between the home location register HLR and visitor location registers VLR directly connected to mobile switching centers MSC. The HLR is in the home network of the mobile subscriber and contains the unchanging subscriber information and the location information of the mobile subscriber with an accuracy of one VLR area. The VLR area typically equals the area served by one mobile switching center. The VLR of the visited mobile switching center VMSC responsible for the area the subscriber is currently visiting contains more exact information about the subscriber's location.

On the leg from LE(B) to subscriber C, the call is first routed to the Gateway Mobile Switching Center GMSC(C) of subscriber C. GMSC(C) is basically any MSC capable of making interrogations to the home location register HLR(C) of subscriber C. In response to having received the HLR inquiry, i.e. the query for routing information, the HLR ascertains the VLR the subscriber is currently visiting, and sends that VLR, i.e. VLR(C), a request PRN (Provide Roaming Number) for a roaming number.

In response VLR(C) returns HLR(C) a roaming number MSRN (Mobile Subscriber Roaming Number) identifying the called subscriber in this VLR. HLR(C) forwards the roaming number to GMSC(C). GMSC(C) adds to the call record comprising information of the call information that subscriber C is receiving the call in the area on VLR(C). Using the received identification MSRN and the message IAM(MSRN) (IAM= Initial Address Message), GMSC(C) establishes a connection to the MSC VMSC(C) currently visited by subscriber C. To identify the called subscriber corresponding to the received roaming number with his identity number IMSI or TMSI (Temporary Mobile Subscriber Identity) VMSC(C) queries VLR(C), which then returns this infor-

mation. According to the specifications, this is done using messages SIFIC (Send Info For Incoming Call) and CC (Complete Call). Having ascertained the identity of the called subscriber, VMSC(C) now establishes the final leg of the call to the called subscriber.

5           In GSM, the basic principle in charging is that the calling subscriber pays the leg between himself and the home network HPLMN(B) (HPLMN= Home Public Land Mobile Network) of the called subscriber. The rest of the route is paid by the called subscriber. The idea here is that the calling subscriber should not have to pay a surprisingly high price for his call,  
10           for example, when the called subscriber is roaming in a distant country. According to this principle, when subscriber A in Finland calls a mobile subscriber B whose home network is in New Zealand but who is currently roaming in Finland, the call is routed via New Zealand. Subscriber A pays the leg from Finland to New Zealand and subscriber B the leg from New Zealand  
15           back to Finland.

          Due to this charging principle, the forwarding subscriber B pays for the leg between LE(B) and the home network of C and subscriber C from his home network onwards. It should be noted that for most operators, reception of calls is free in the home network HPLMN (Home Public Land Mobile Network) of the subscriber. However, when the subscriber is roaming  
20           outside his home network, he is charged for the roaming leg from his own home network to the VPLMN (Visited Public Land Mobile Network) he is currently visiting.

          The problem with this charging principle is that it is unfair to the  
25           mobile subscriber if the call has been forwarded. When the principle is applied, a GSM subscriber who answers a forwarded call is charged for the roaming legs even if he is not the intended recipient of the call. For example, let us consider a situation in which Beth and Cindy travel abroad together. Cindy has a mobile phone, and Beth forwards calls destined to her fixed  
30           telephone to Cindy's mobile phone. Now, when Andy calls Beth, Andy is charged for the local telephone call leg of the call. Beth pays the leg from her own exchange to the HPLMN of Cindy, the price of which is the price of a national call to a mobile telephone. Cindy, in turn, pays for the roaming leg, i.e. from her HPLMN to her VPLMN. In many cases, the roaming leg is the  
35           most expensive of all the legs of the call. Thus, even if the call is from Andy to Beth, Cindy is the one who is charged the most.

The objective of this invention is to solve the above-mentioned problem of the prior art. This objective is achieved using the method and apparatus specified in the independent claims.

### Summary of the invention

5 This invention proposes a new charging principle according to which the roaming leg is paid entirely by the party who forwarded the call to a mobile subscriber.

10 In an exemplary embodiment, the call is first routed to the exchange of subscriber B, who has forwarded his calls. After determining that the call is to be forwarded to a mobile subscriber C, the exchange routes the call to the gateway mobile switching center GMSC capable of making inter-rogations to the home location register of subscriber C. The GMSC adds in the call record of the call the information that the call has been forwarded by the called subscriber B.

15 When generating the charging record for the call, the called subscriber B is charged for the leg between the GMSC and subscriber C. Thus subscriber C does not have to pay for calls addressed to subscriber B. To minimize the call costs to subscriber B, as direct a route as possible is preferably used on the leg between the GMSC and subscriber C. The charging  
20 record may be generated in other network elements than the GMSC, such as in the billing center.

### Brief description of the drawings

The invention is described more closely with reference to the accompanying schematic drawings, in which

25

Figure 1 shows a forwarded call;

Figures 2 and 3 show a call forwarded to a mobile subscriber;

Figure 4 shows normal routing of a call to a mobile subscriber;

Figure 5 shows optimal routing of a mobile terminated call;

30 Figure 6 shows direct routing of a call to a mobile subscriber; and

Figures 7 and 8 show signaling of call establishment procedure.

### Detailed description of the invention

A technical solution for implementing the invention is illustrated below. The exemplary solution assumes that the ISUP (ISDN User Part) signaling protocol is used. However, the chosen signaling protocol has an effect only on the messages used, and the invention can just as well be implemented using some other signaling protocol.

When using ISUP, the following signaling information concerning forwarded calls can be used:

•**redirecting indicator**: Information sent in either direction, i.e. from the exchange of the forwarding subscriber (the forward direction) or vice versus (the backward direction) indicating whether the call has been diverted or rerouted and whether or not presentation of redirection information to the calling party is restricted.

•**redirecting number**: Information sent in the forward direction when a call is diverted, indicating the number from which the call was diverted.

•**redirecting reason**: Information sent in either direction indicating, in the case of calls undergoing multiple redirections, the reason why the call has been redirected.

•**redirection counter**: Information sent in either direction indicating the number of redirections which have occurred on a call.

•**redirection indicator**: Information sent to indicate whether the call has undergone diversion or rerouting. It also contains information about presentation restrictions.

•**redirection information**: Information sent in either direction giving information about call redirection or call rerouting.

•**redirection number**: Information sent in the backward direction indicating the number to which the call must be rerouted or has been forwarded.

•**redirection number restriction indicator**: Information sent in the backward direction indicating whether the forwarded-to user allows the presentation of his number.

•**redirection reason**: Information sent in the call diversion information parameter and the redirection information parameter to indicate the reason for the redirection.

The signaling information is presented more thoroughly in ITU-T (ITU= International Telecommunication Union, ITU-T= the ITU Telecommunication standardization sector) recommendations Q.762 and Q.763 published by ITU.

5 For clarity in the example, we shall use the following names for the parties participating in the call:

- Andy: the original calling party. Andy may or may not be a GSM subscriber.

10 • Beth: the intended recipient of the call. Beth may or may not be a GSM subscriber. Beth has forwarded her calls to Cindy. In the examples, Beth has instructed that all her calls be forwarded, i.e. she has activated the CFU service.

- Cindy: the mobile subscriber who finally answers the call.

15 Two different situations are to be considered depending on whether the call is routed via the gateway exchange GMSC(C) of Cindy or not. The former is the current GSM practice, but the latter becomes possible with implementation of the optimal routing feature included in GSM phase 2+ being currently specified by ETSI (European Telecommunication Standards Institute).

20 We shall first study the case where optimal routing is not possible. This case is shown in Figure 4. The procedure starts when Andy dials Beth's phone number. In the call establishment procedure, Andy's exchange LE(A) analyzes the dialed phone number. On the basis of the analysis, the exchange sends Beth's exchange the message IAM(ISDN(B)) requesting the  
25 establishment of a connection. In the IAM message, the ISDN number ISDN(B) of Beth is specified as the called party number and the ISDN number of Andy as the calling party number.

In response to having received the IAM message, the exchange LE(B) of Beth consults its database and finds out that Beth has instructed  
30 her calls be unconditionally forwarded to Cindy's mobile phone. In response, LE(B) sends the gateway MSC GMSC(C) of Cindy the IAM message IAM(MSISDN(C)). In the message, the redirection indicator shows that the call has been forwarded. The redirecting number is the ISDN number of Beth, and the redirecting reason CFU. The redirection counter has the value  
35 1. The called party number is the MSISDN number MSISDN(C) of Cindy and the calling party number the ISDN number ISDN(A) of Andy.



In response to having received the message IAM(MSISDN(C)), GMSC(C) inspects the redirection number information included in the message. GMSC(C) notes that the call has been forwarded and adds the identity of the forwarding subscriber Beth to the generated call record. GMSC(C) sends  
5 Cindy's home location register HLR(C) the request SRI (Send Routing Information) for routing information. In response to having received the message, HLR(C) asks the visitor location register VLR(C) connected to the MSC VMSC under which Cindy is currently roaming for a roaming number MSRN (Mobile Station Roaming Number). VLR(C) returns the MSRN, and HLR(C)  
10 forwards the MSRN to GMSC(C). GMSC(C) establishes the connection to VMSC(C) by sending it the message IAM(MSRN), and the VMSC(C) establishes the connection to Cindy's mobile phone C via the base station controller BSC(C) and the base transceiver station BTS(C). The call redirection information included in the message is similar to that included in the IAM  
15 message sent from LE(B) to GMSC(C). VMSC(C) includes the information in its call record that the call had been forwarded by Beth.

Having completed the call, the call records generated are sent to the billing center (not shown in the figure) or to some other network element handling the billing information. On the basis of the call records, Beth is also  
20 charged for the roaming leg from GMSC(C) to VMSC(C). The only changes in the existing network elements and protocols is the functionality of adding the call record information about the call being forwarded and the identity of the forwarder. In addition, it must be arranged that the billing center charges the forwarder, i.e. Beth, for the roaming leg.

25 The use of optimal routing has some influence on the above-mentioned methodology. The method of optimal routing is currently being standardized by ETSI. The method is described in more detail in specifications GSM 02.79 and GSM 03.79 published by ETSI. The basic idea of the optimal routing method is to route the call using the most direct route between subscribers A and B, and is shown in Figure 5 for nonforwarded calls.  
30 Instead of immediately establishing a connection to the gateway MSC GMSC(B) of the home network of the called subscriber, the gateway MSC GMSC(A) of the calling subscriber sends the home location register HLR(B) of the called subscriber the request SRI for routing information. HLR(B) asks  
35 the visitor location register VLR(B) of B for a roaming number, and forwards the routing number to GMSC(A). Using the roaming number, GMSC(A) es-

establishes a connection directly to VMSC(B) visited by the called subscriber. Thus, the call is not necessarily routed through the home network of subscriber B, since the home network is contacted in the HLR inquiry only. Using optimal routing, the interexchange call expenses and thus the total call price can be reduced.

GSM MoU (Memorandum of Understanding), an organization of GSM operators, has specified two conditions to be met by the implementation of optimal routing:

1. use of optimal routing may not increase the call price for any subscriber (tariff requirement), and
2. at least in the first phase of the service, one call leg is always paid by one subscriber.

Because the expenses caused by different legs can not be assumed to be known in the first phase of optimal routing, optimal routing is used in the first phase only if both GMSC(A) and VMSC(B) or both VMSC(B) and HLR(B) are in the same country.

The aim of optimal routing is to route the call as directly as possible. Thus, the HLR inquiry requesting information about the location of the subscriber to whom the call is to be forwarded must be made as early as possible in the establishment procedure of the call. If the calling subscriber belongs to the same mobile telecommunications system as the called subscriber, the inquiry can be made by the gateway MSC GMSCA of subscriber A. If the calling subscriber A is not a subscriber of the same mobile telecommunications system as B, the call may be routed to a network element capable of making HLR inquiries.

The call establishment procedure according to the invention in a case where optimal routing is possible is shown in Figure 6. In the figure, Cindy is a mobile subscriber and Andy and Beth are mobile subscribers or subscribers whose exchange is capable of making HLR interrogations. However, for the presented embodiment it is only essential that Beth's exchange is capable of making interrogations to Cindy's HLR without first routing the call to a exchange in Cindy's home network.

Again, the procedure begins when Andy dials Beth's phone number. In response to having received the phone number, Andy's exchange GMSC(A) analyzes the number. If Beth is a fixed network subscriber or Andy's network is not capable of making interrogations to HLR(B), Andy's

exchange sends on the basis of the number analysis Beth's exchange the message IAM(ISDN(B)) requesting the establishment of a connection. In the IAM message, the ISDN number ISDN(B) of Beth is defined as the called party number and the ISDN number of Andy as the calling party number. On the other hand, if Beth is a mobile subscriber and Andy's network is capable of interrogating the home location register HLR(B) of Beth, HLR(B) is sent a request SRI for routing information.

Generally a call leg is paid by only one subscriber. Therefore, in the preferred embodiment of the present invention the call is always routed via GMSC(B), because the direct route from Andy to Cindy may cost more than the route from Beth to Cindy or more than from Andy to Beth. HLR(B) has no means of knowing where subscriber C is, unless HLR(B)=HLR(C). The decision concerning the tariff requirement can thus not be made by HLR(B).

For the above reason HLR(B) returns GMSC(A) (or Andy's fixed network exchange capable of making HLR interrogations) instructions to route the call to an exchange GMSC(B) in Beth's home network. In response, GMSC(A) sends GMSC(B) the message IAM(ISDN(B)) requesting the establishment of a connection based on the analyses. In the IAM message, the ISDN number ISDN(B) of Beth is specified as the called party number and the ISDN number ISDN(A) of Andy as the calling party number. In response to having received the IAM message, GMSC(B) interrogates HLR(B). HLR(B) returns the call forwarding (CF) data.

GMSC(B) recognizes Cindy's number as a GSM number, and interrogates HLR(C) for a roaming number and routes the call directly to VMSC(C). According to the invention, B pays both the leg from GMSC(B) to the home network HPLMN(C) of Cindy and from HPLMN(C) to C. Thus, direct routing between GMSC(B) and C is always cheaper for B. A method of bypassing the tariff requirement for optimal routing is presented in FI 973996, which at the filing date of the present application is not yet laid open to the public. The basic idea of the invention presented in the referenced application is to specify a condition for routing the call directly which is independent of the tariff requirement for direct routing.

According to one embodiment presented in the referred application, the calls within a pre-specified user group comprising two or more subscribers are always routed directly. Thus, the leg from GMSC(B) to C can be

specified as always using the direct route by adding to Cindy's subscriber information stored in HLR(C) a note to bypass the tariff requirement for calls being forwarded by Beth. In another embodiment presented in the referred application, the call is specified to be routed directly on a call per call basis.

- 5 This can be achieved by adding to the call information a flag indicating that the call is to be routed directly. Thus, GMSC(B) adds a direct routing flag into the call information sent to HLR(C) in the HLR inquiry.

Because the call between GMSC(B) and C is specified as a directly routed call, HLR(C) sends Cindy's visitor location register VLR(C) the request PRN for a roaming number. VLR(C) returns the roaming number MSRN in the message PRN ACK, and HLR(C) relays this to GMSC(B) in the message SRI ACK. GMSC(B) then establishes a connection to VMSC(C) directly using the received MSRN. In addition, GMSC(B) adds to the call information a notification that the call has been forwarded by Beth.

- 15 When the call is completed, the call records generated are sent to the billing center (not shown in the figure) or to some other network element handling the billing information. On the basis of call records, Beth is charged for the whole leg from GMSC(B) to Cindy.

The implementation of the above embodiments of the present invention does not require changes in existing protocols but only to GMSC and HLR functionalities. If the call records generated in current switches contain suitable call forwarding information, part of the implementation can be done in the billing center. A billing center according to the invention is adapted to receive call records from switching elements and to charge subscriber B for all the call legs between the transit point and subscriber C.

- 20 In yet another embodiment of the present invention there are means for signaling the information that the call is to be forwarded by Beth to HLR(C). In this case, the call can be routed directly to subscriber C without passing via the home network of subscriber B. Implementations of this embodiment are shown in Figures 7 and 8.

In the embodiment shown in Figure 7, GMSC(A) first sends HLR(B) the request SRI(MSISDN(B)) for routing information identifying the called subscriber B. In response to having received the message HLR(B) determines that the called subscriber B has forwarded his calls to subscriber C. In response to this HLR(B) sends directly to HLR(C) the request SRIH(MSISDN(C), FW) for routing information determining that the incoming

- 30  
35

call has been forwarded to subscriber C by subscriber B. Having received this request HLR(C) determines the current VLR address VLR(C) of subscriber C and sends VLR(C) the request PRN for a roaming number. VLR(C) returns the roaming number to HLR(C), which forwards it to HLR(B) in the message SRIHack. HLR(B) checks whether the direct route meets the tariff requirement, i.e. that in using the direct route neither Andy or Beth would have to pay more than they would have to pay when using the indirect route passing via GMSC(B). In the first phase of optimal routing, this requirement is met if the direct route from GMSC(A) to Cindy is cheaper than the leg from GMSC(A) to GMSC(B). If the tariff requirement is met, HLR(B) forwards the roaming number to GMSC(A) in the message SRIack. In response to having received this message GMSC(A) establishes the connection to subscriber C using a direct route. If the requirement is not met HLR(B) sends GMSC(A) the message SRI error, in response to which GMSC(A) establishes a connection to the gateway exchange GMSC(B) of subscriber B. GMSC(B) continues the routing procedure as presented earlier in this application.

In the embodiment shown in Figure 8, GMSC(A) sends HLR(B) the request SRI(MSISDN(B)) for routing information. HLR(B) determines that the called subscriber B has forwarded his calls to subscriber C and sends to HLR(C) the request SRIH(MSISDN(C), FW) for routing information just as in Figure 7. Having received this request HLR(C) determines the current VLR address VLR(C) of subscriber C and returns the address VLR(C) to HLR(B) in the message SRIHack. HLR(B) checks whether the direct route meets the tariff requirement, i.e. that in using the direct route, neither Andy or Beth would have to pay more than they would have to pay when using the indirect route passing via GMSC(B). If this requirement is met, HLR(B) sends VLR(C) the request PRN for a roaming number. VLR(C) sends the roaming number to HLR(B), which forwards it to GMSC(A) in message SRIack. In response to having received this message GMSC(A) establishes the connection to subscriber C using a direct route. If the requirement is not met HLR(B) sends GMSC(A) the message SRI error, in response to which GMSC(A) establishes a connection to the gateway exchange GMSC(B) of subscriber B. GMSC(B) continues the routing procedure as presented earlier in this application.

It must be noted that the embodiments of Figures 7 and 8 are not consistent with current GSM specifications, which have no mechanisms for dialogs between two home location registers.

5 In the above exemplary embodiments, the invention is implemented in a system utilizing the ISUP protocol. However, the scope of the invention is not limited to systems utilizing ISUP protocol. The only limitation concerning the signaling protocols is that the protocols used must provide a means for transferring between the exchanges the necessary information about the forwarded call. Likewise, although used in the examples, sub-  
10 scriber C does not necessarily have to be a GSM subscriber, as in the examples. He may as well be a subscriber of any other mobile telecommunication network using similar charging principles. The invention can be used with any call forwarding service, and is not limited to the CFU service used in the examples.

### Claims

1. A method of handling calls forwarded to a subscriber of a mobile telephone network, the mobile telephone network comprising mobile subscribers, every mobile subscriber having a home network, in which home network information about the location of the mobile subscriber is registered, and in which method

information about call forwarding is stored in the home network of subscriber B, who has forwarded his incoming calls to a mobile subscriber C, characterized in that in response to a call addressed to subscriber B,

the call is routed to a gateway exchange capable of interrogating the home location register of subscriber C, and from the gateway exchange to subscriber C,

a call record comprising information about the call is generated in the gateway exchange, to the call record is added a notification that the call has been forwarded by subscriber B, and

subscriber B is charged for the leg between the gateway exchange and subscriber C.

2. A method according to claim 1, characterized in that the call is routed via a network element of the home network of the called subscriber B, the network element becoming the transit point for the call.

3. A method according to claim 2, characterized in that the call is routed from the transit point to an interrogating network element being capable of making interrogations of the home location register of subscriber C, and from that network element directly to subscriber C, without passing via the home network of subscriber C.

4. A method according to claim 3, characterized in that to the home location register of subscriber C is added instructions to always route calls forwarded by subscriber B using as direct a route as possible,

the interrogating network element sends the home location register a query for routing information,

the home location register returns the interrogating network element routing information routing the call using a direct route, and

the call is routed using the direct route.

5. A method according to claim 3, characterized in that

the interrogating network element sends the home location register a query for routing information, specifying in the query that the call is to be routed using as direct a route as possible in all cases,

the home location register returns the interrogating network element routing information routing the call using a direct route, and  
5 the call is routed using the direct route.

6. A method according to claim 2 in a system comprising a billing center for handling billing data, c h a r a c t e r i z e d in that the call record is sent to the billing center, and in the billing center subscriber B is charged  
10 for all the call legs between the transit point and subscriber C.

7. A method according to claim 1, c h a r a c t e r i z e d in that the call is routed directly to subscriber C without passing via the home network of subscriber B.

8. A method according to claim 7 for handling calls in which the  
15 called subscriber B is a mobile subscriber and the information concerning the call forwarding is stored in the home location register HLR(B) of subscriber B, c h a r a c t e r i z e d in that the routing of the forwarded call includes the steps of

routing the call to a gateway exchange capable interrogating  
20 HLR(B),

sending from the gateway exchange to HLR(B) a request for routing information,

determining in HLR(B) that the call is to be forwarded to subscriber C,

25 sending from HLR(B) to the home location register HLR(C) of subscriber C a request for routing information,

returning from HLR(C) to HLR(B) information about the current location of subscriber C,

checking in HLR(B) whether using a direct route between the  
30 gateway exchange and subscriber C minimizes the call costs for subscriber B, and, if using a direct route does minimize the call costs for subscriber B,

returning from HLR(B) to the gateway exchange routing information for routing the call directly from the gateway exchange to subscriber C.

9. A method according to claim 7 in a system comprising a billing  
35 center for handling billing data, c h a r a c t e r i z e d in that the call record



is sent to the billing center, and in the billing center subscriber B is charged for all the call legs not charged from the calling subscriber.

10. A billing center for a telecommunication system for generating and handling billing data, the telecommunication system comprising subscribers and switching elements,

in which system calls may be forwarded to a subscriber of a mobile telephone network,

the mobile telephone network comprising a home location register storing information about the location of the mobile subscriber,

information about call forwarding is stored in the home network of subscriber B, who has forwarded his incoming calls to mobile subscriber C, and in response to a call destined to subscriber B,

the call is routed to a gateway exchange capable of interrogating the home location register of subscriber C, and from the gateway exchange to subscriber C, and

a call record comprising information about the call is generated, characterized in that the billing center is adapted to receive call records from the switching elements and to charge subscriber B for all the call legs between the gateway exchange and subscriber C.

11. A telecommunication system comprising subscribers, home location registers storing subscriber information such as the location of mobile subscribers, and switching elements such as gateway exchanges, the gateway exchanges being capable of interrogating home location registers,

in which system calls may be forwarded to a subscriber of a mobile telephone network,

information about call forwarding is stored in the home network of subscriber B, who has forwarded his incoming calls to a mobile subscriber C, and in response to a call destined to subscriber B,

the call is routed to a gateway exchange capable of interrogating the home location register of subscriber C and from the gateway exchange to subscriber C, and

a call record comprising information about the call is generated, characterized in that the telecommunication system is adapted to generate call records in switching elements and to

charge subscriber B for all the call legs between the gateway exchange and subscriber C.

12. A telecommunication system according to claim 11, characterized in that the system is adapted, in response to a call addressed to a mobile subscriber B having forwarded his calls to mobile subscriber C and called by subscriber A to

route the call to a gateway exchange capable of making interrogations to HLR(B), to

send from the gateway exchange to HLR(B) a request for routing information, to

determine in HLR(B) that the call is to be forwarded to subscriber C, and in response to that to

send from HLR(B) to the gateway exchange a message causing the gateway exchange to route the call to a second gateway exchange located in the home network of subscriber B,

route the call to the second gateway exchange, and to

route the call from the second gateway exchange to subscriber C.

13. A telecommunication system according to claim 11, characterized in that the system is adapted, in response to a call addressed to a mobile subscriber B having forwarded his calls to a mobile subscriber C and called by subscriber A to

route the call to a gateway exchange capable of making interrogations to HLR(B), to

send from the gateway exchange to HLR(B) a request for routing information, to

determine in HLR(B) that the call is to be forwarded to subscriber C, to

send from HLR(B) to the home location register HLR(C) of subscriber C a request for routing information, to

to return from HLR(C) to HLR(B) information about the current location of subscriber C,

to define in HLR(B) whether using a direct route between the gateway exchange and subscriber C minimizes the call costs for subscribers A and B, and, if using a direct route minimizes the call costs for subscriber B,

to

return from HLR(B) to the gateway exchange routing information for routing the call directly from GMSC(A) to subscriber C.

14. A home location register for a telecommunication system comprising subscribers, home location registers storing subscriber information such as location of mobile subscribers, and switching elements such as gateway exchanges, the gateway exchanges being capable of interrogating home location registers,

in which system calls may be forwarded to a subscriber of a mobile telephone network,

the mobile telephone network comprising a home location register storing information about the location of the mobile subscriber,

information about the call forwarding is stored in the home network of the called subscriber B, who has forwarded his calls to the mobile subscriber C, and in response to a call destined to subscriber B,

the call is routed to a gateway exchange capable of interrogating the home location register of subscriber C and from the gateway exchange to subscriber C,

characterized in that the home location register is adapted to

receive a request for routing information from a gateway exchange, and, in response to having determined that the call is to be forwarded to subscriber C, to

send to the gateway exchange a message causing the gateway exchange to route the call to a second gateway exchange located in the home network of subscriber B.

15. A home location register for a telecommunication system comprising subscribers, home location registers storing subscriber information such as location of mobile subscribers, and switching elements such as gateway exchanges, the gateway exchanges being capable of interrogating home location registers,

in which system calls may be forwarded to a subscriber of a mobile telephone network,

the mobile telephone network comprising a home location register storing information about the location of the mobile subscriber,

information about the call forwarding is stored in the home network of the called subscriber B, who has forwarded his calls to the mobile subscriber C, and in response to a call destined to subscriber B,

the call is routed to a gateway exchange capable of interrogating the home location register of subscriber C and from the gateway exchange to subscriber C,

characterized in that the home location register is adapted to

receive a request for routing information from a gateway exchange,

determine that the call is to be forwarded to subscriber C,

send to the home location register HLR(C) of subscriber C a request for routing information,

receive from HLR(C) information about the current location of subscriber C,

determine whether using a direct route between the gateway exchange and subscriber C minimizes the call costs for subscriber B, and, if using a direct route minimizes the call costs for subscriber B,

return to the gateway exchange routing information for routing the call directly from GMSC(A) to subscriber C.

1/5

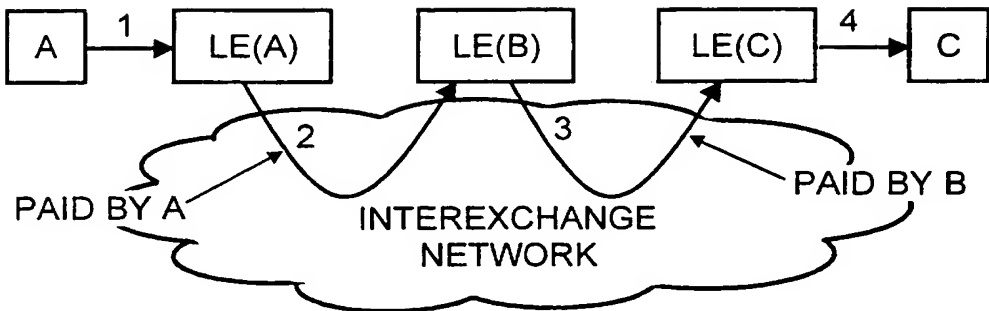


FIG. 1.

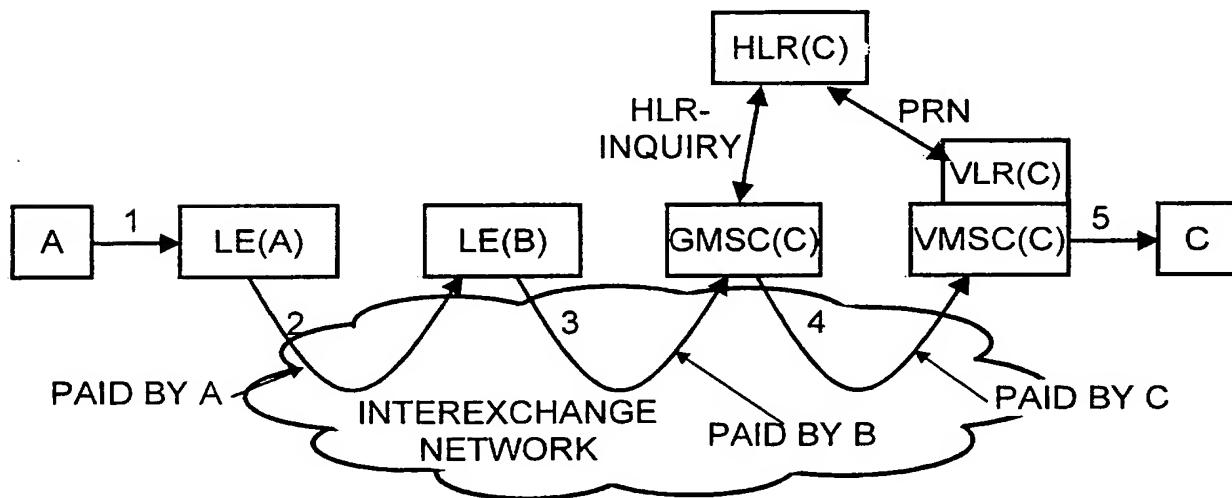


FIG. 2.

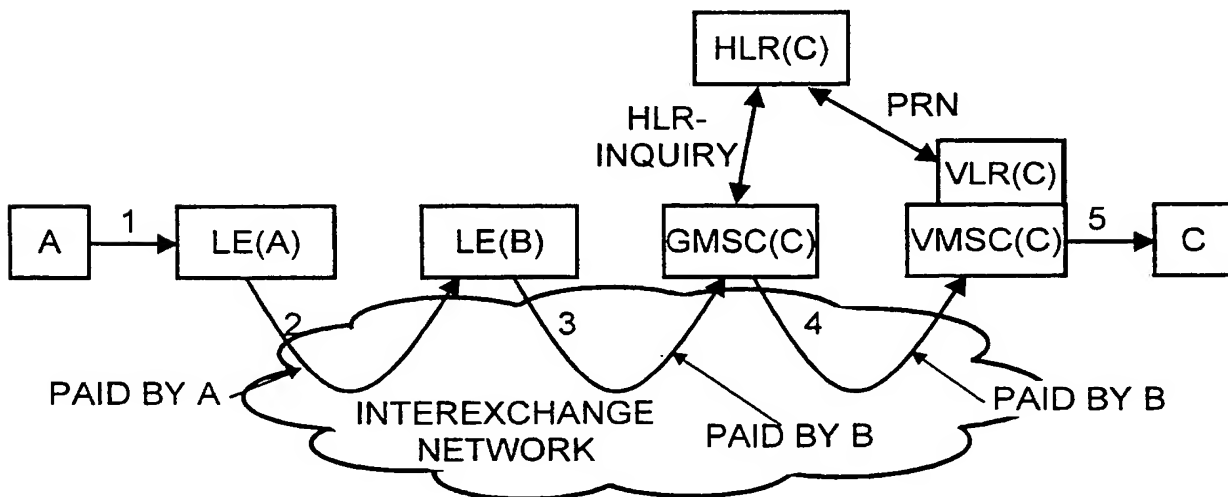


FIG. 3.

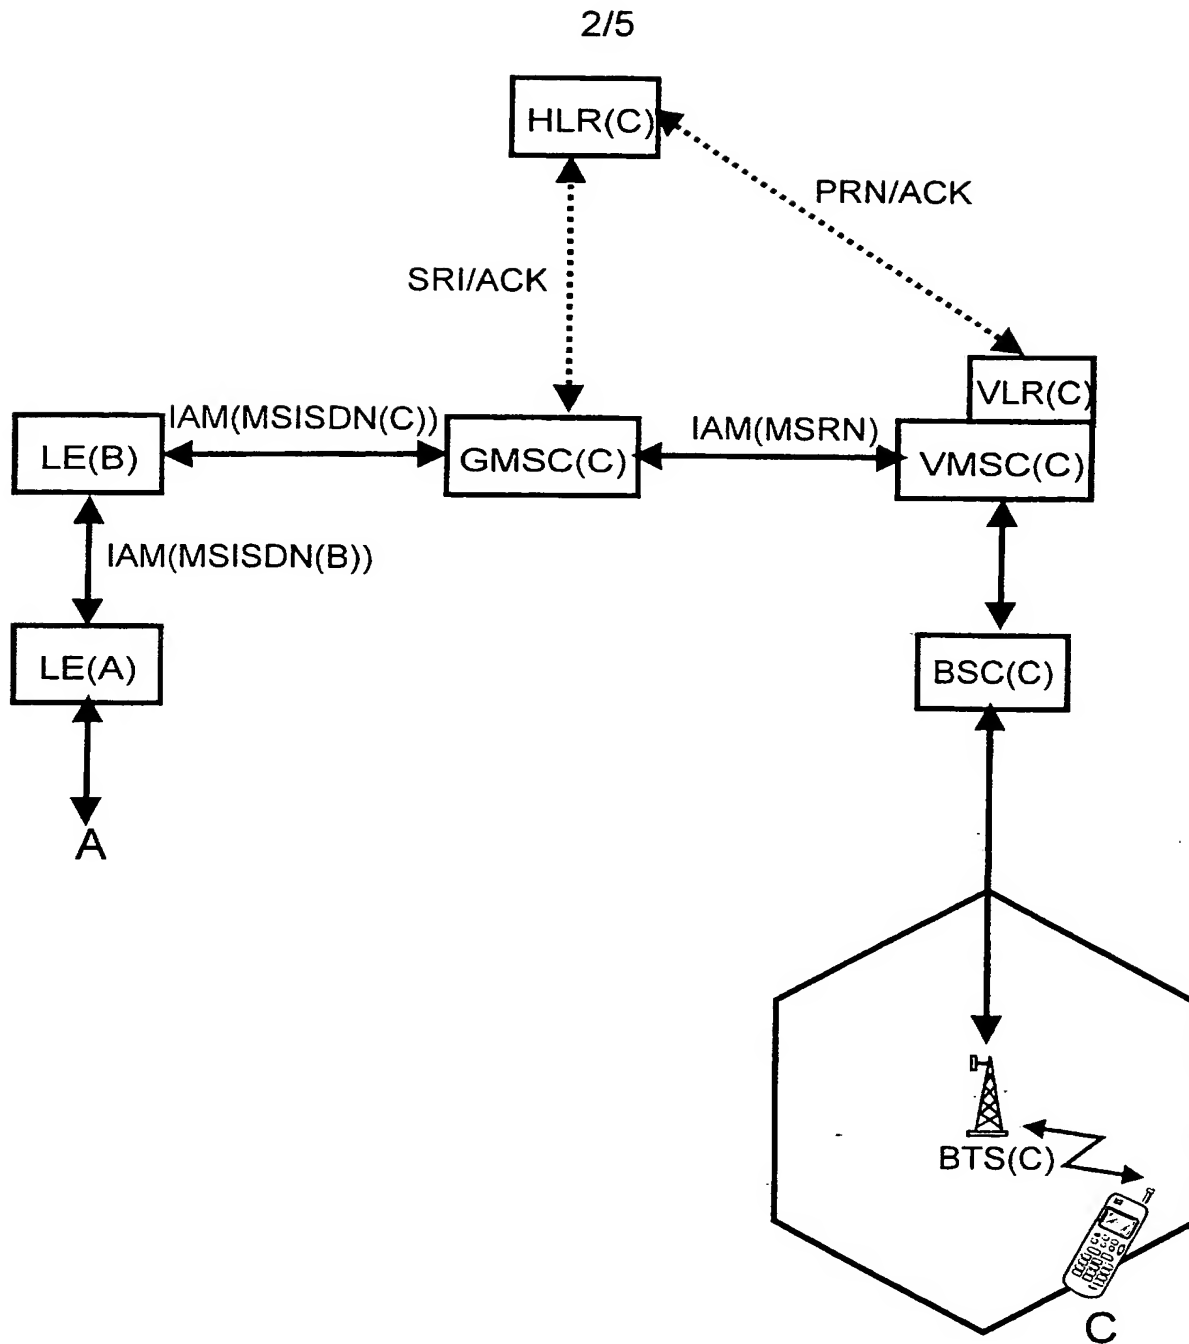


FIG. 4.

3/5

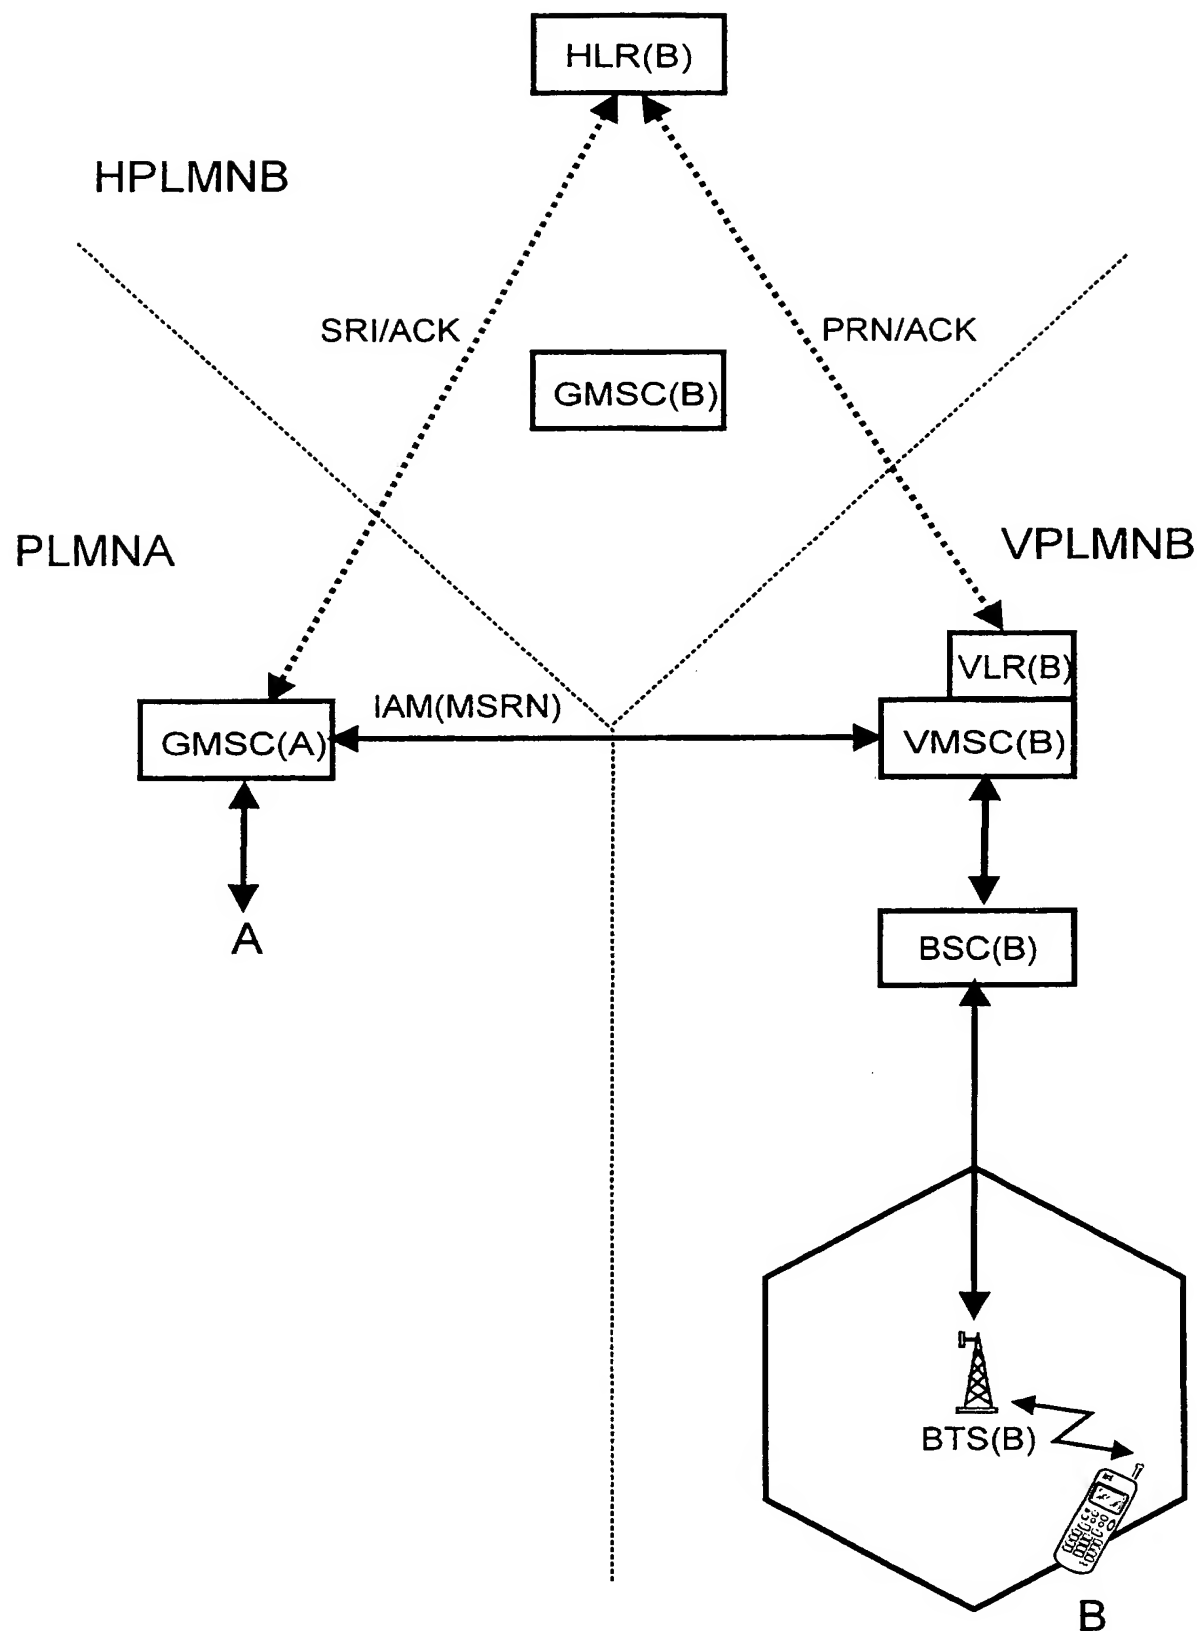


FIG. 5.

BEST AVAILABLE COPY

4/5

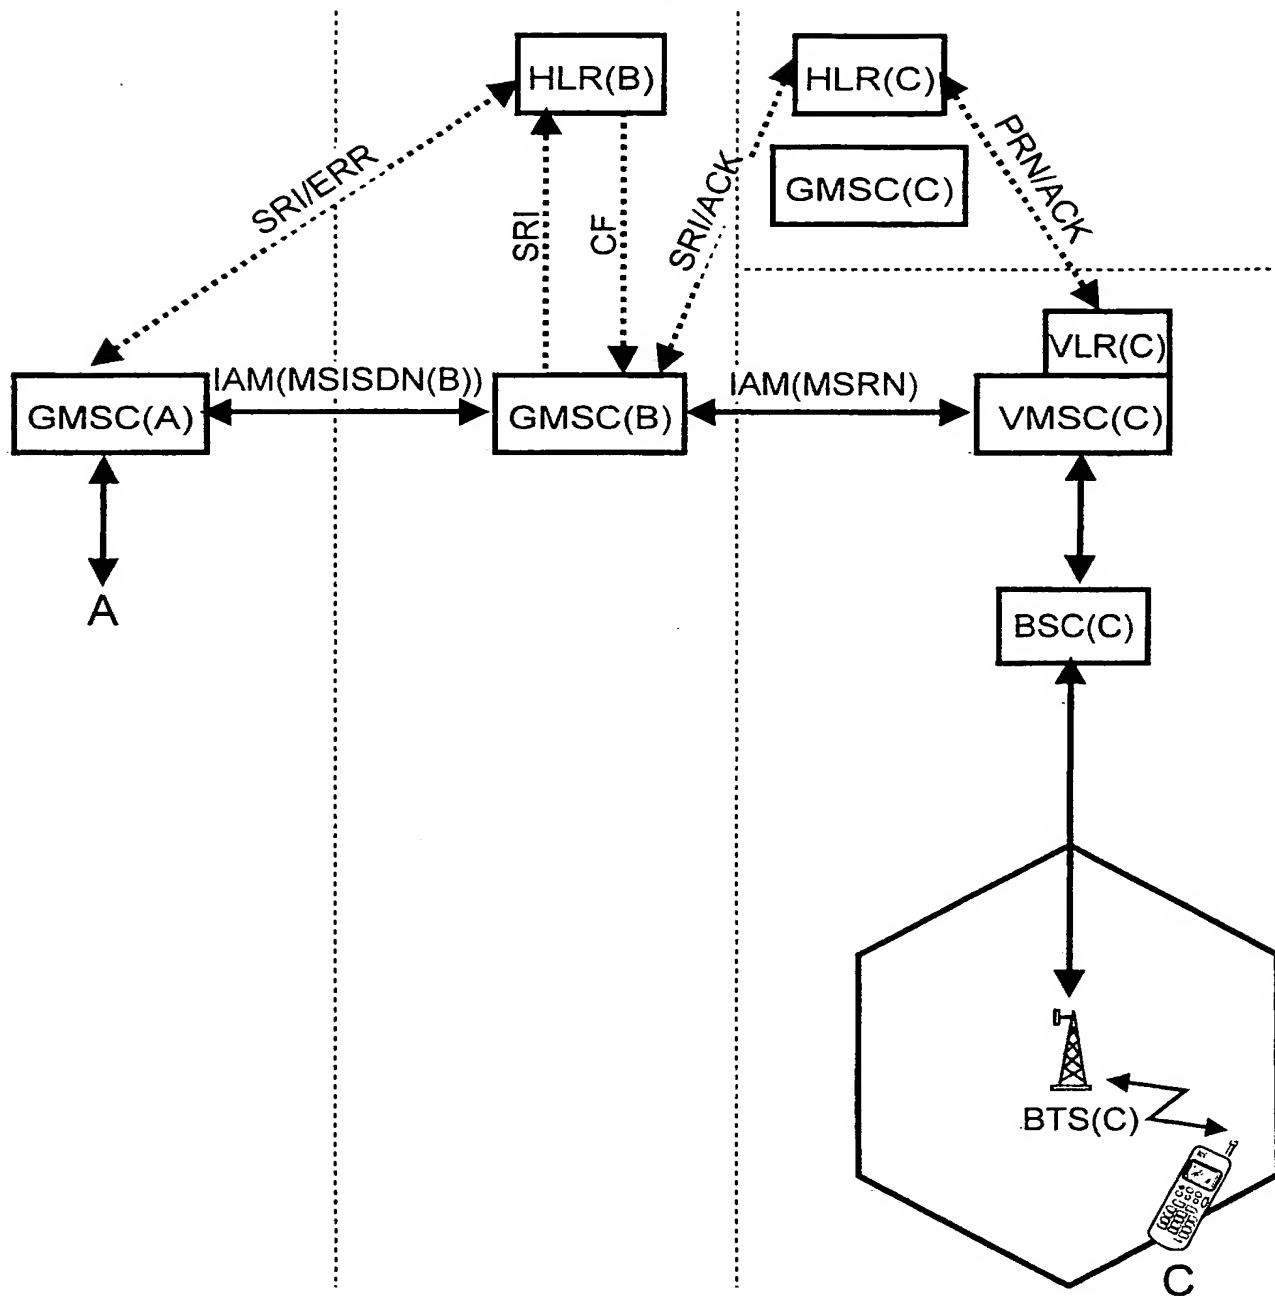


FIG. 6.



5/5

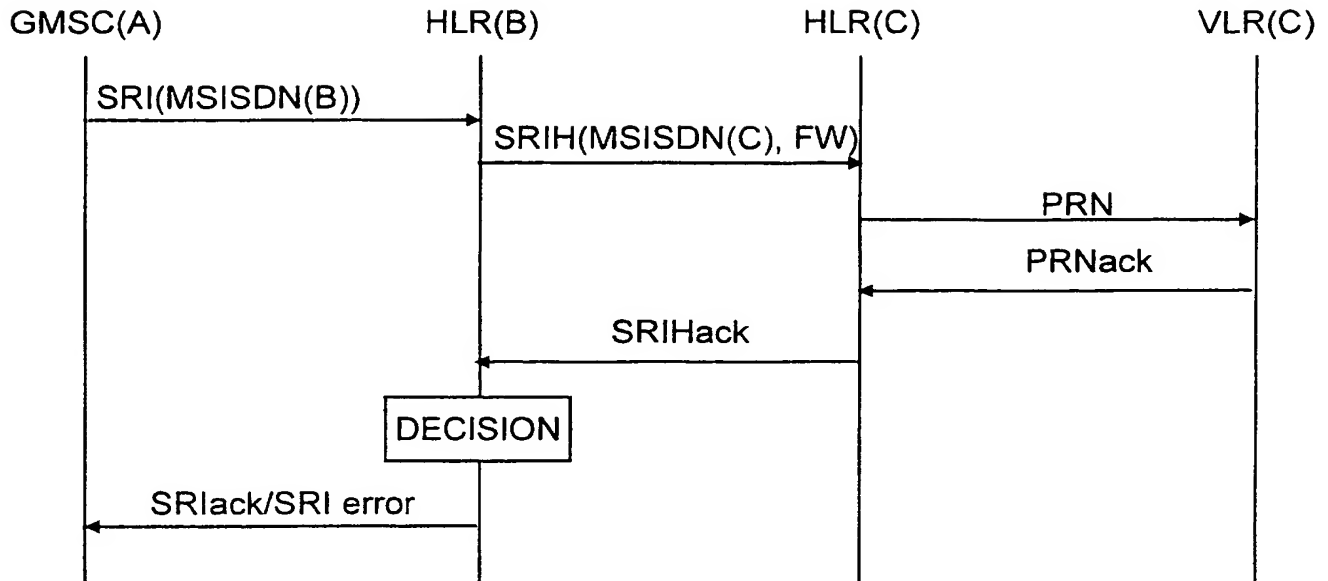


FIG. 7.

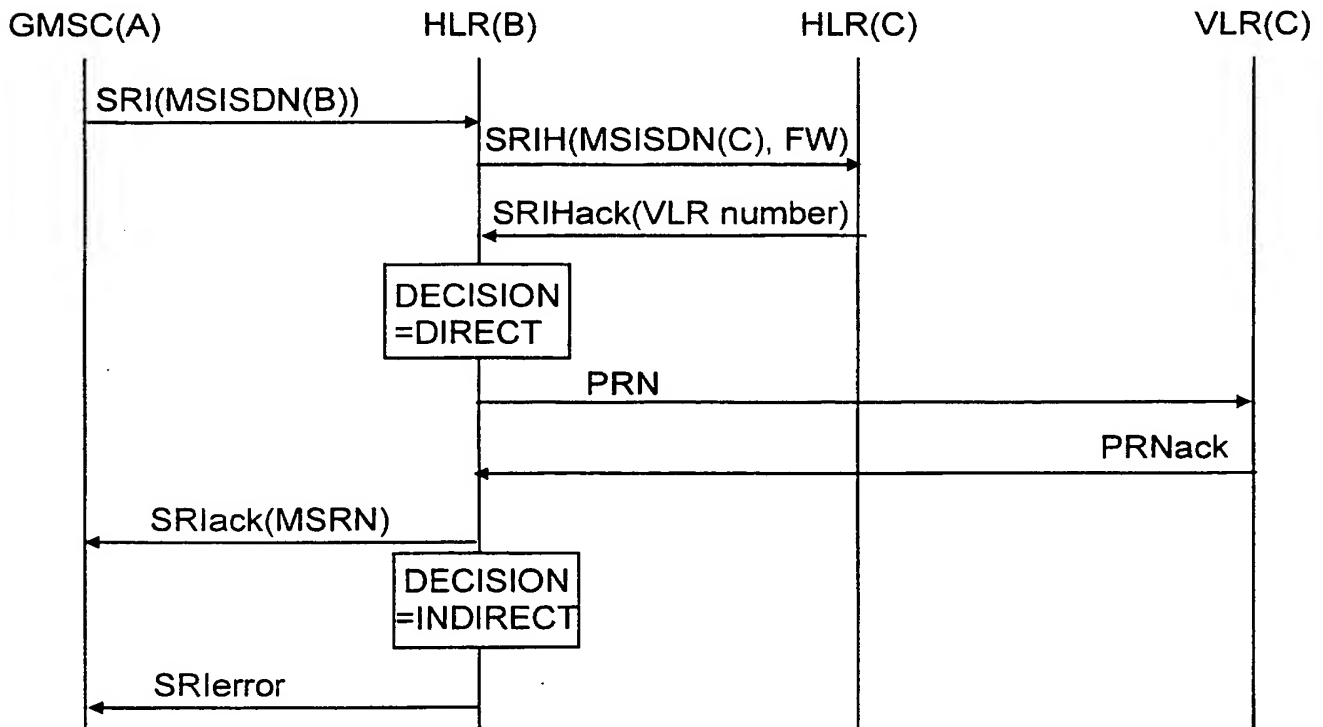


FIG. 8.


This Page Blank (uspto).



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>H04Q 7/22, H04M 3/54, H04Q 7/38</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 99/31916</b> <b>(43) International Publication Date:</b> 24 June 1999 (24.06.99)
<b>(21) International Application Number:</b> PCT/FI98/00969 <b>(22) International Filing Date:</b> 11 December 1998 (11.12.98) <b>(30) Priority Data:</b> 974519 15 December 1997 (15.12.97) FI <b>(71) Applicant (for all designated States except US):</b> NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> VERKAMA, Markku [FI/FI]; Hakamäki 2 A 12, FIN-02120 Espoo (FI). AXERUD, Bo [SE/FI]; Vältälöntie 31 B 4, FIN-00660 Helsinki (FI). <b>(74) Agent:</b> PATENT AGENCY COMPATENT LTD.; P.O. Box 156, FIN-00511 Helsinki (FI).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>  <b>(88) Date of publication of the international search report:</b> 26 August 1999 (26.08.99)

(54) Title: HANDLING OF FORWARDED CALLS

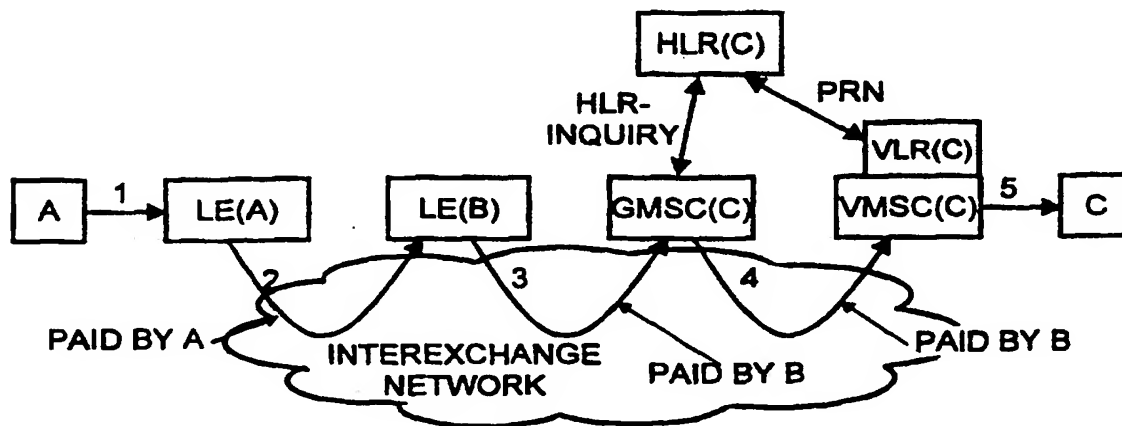

## (57) Abstract

This invention proposes a new charging principle according to which the roaming leg is paid entirely by the party who forwards the call to a mobile subscriber. In an exemplary embodiment, the call is first routed to the exchange of subscriber B, who has forwarded his calls. After determining that the call is to be forwarded to a mobile subscriber C, the exchange routes the call to the gateway mobile switching center GMSC capable of making interrogations to the home location register of subscriber C. When the charging record for the call is generated, the called subscriber B is charged for the leg between the GMSC and subscriber C. Thus, subscriber C does not have to pay for calls addressed to subscriber B. To minimize the call costs to subscriber B, as direct a route as possible is preferably used on the leg between the GMSC and subscriber C.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00969

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/22, H04M 3/54, H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9531076 A2 (NOKIA TELECOMMUNICATIONS OY), 16 November 1995 (16.11.95), page 4, line 17 - page 6, line 8  --	1,10-11, 14-15
A	WO 9620574 A1 (NOKIA TELECOMMUNICATIONS OY), 4 July 1996 (04.07.96), page 4, line 30 - page 5, line 26  --	1,10-11, 14-15
A	EP 0886422 A1 (ALCATEL ALSTHOM COMPAGNIE GENERALE D'ELECTRICITE), 23 December 1998 (23.12.98), column 2, line 11 - line 27  -- -----	1,10-11, 14-15



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

11 June 1999

Date of mailing of the international search report

19 -06- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Henrik Bodin/cs

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

03/05/99

International application No.

PCT/FI 98/00969

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9531076 A2	16/11/95	AU 683163 B	30/10/97
		AU 2346595 A	29/11/95
		EP 0707776 A	24/04/96
		FI 97934 B,C	29/11/96
		FI 942053 A	05/11/95
		JP 8512447 T	24/12/96
WO 9620574 A1	04/07/96	AU 700807 B	14/01/99
		AU 1371595 A	19/07/96
		EP 0808548 A	26/11/97
		FI 972686 A	19/06/97
		JP 10512108 T	17/11/98
EP 0886422 A1	23/12/98	CA 2237973 A	18/12/98
		JP 11074997 A	16/03/99